

(19)



(11)

**EP 1 131 853 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**09.01.2008 Bulletin 2008/02**

(21) Application number: **98950282.8**

(22) Date of filing: **25.10.1998**

(51) Int Cl.:  
**H01L 41/04 (2006.01)**

(86) International application number:  
**PCT/IL1998/000519**

(87) International publication number:  
**WO 2000/025368 (04.05.2000 Gazette 2000/18)**

(54) **DRIVER FOR PIEZOELECTRIC MOTORS**

TREIBER FÜR PIEZOELEKTRISCHE MOTOREN

UNITE DE COMMANDE DE MOTEURS PIEZOELECTRIQUES

(84) Designated Contracting States:  
**DE DK GB NL**

(43) Date of publication of application:  
**12.09.2001 Bulletin 2001/37**

(73) Proprietor: **NANOMOTION LTD**  
**Yoqne'am Ilit 20692 (IL)**

(72) Inventor: **BEN-YAAKOV, Shmuel**  
**84236 Beer-Sheva (IL)**

(74) Representative: **van Westenbrugge, Andries et al**  
**Nederlandsch Octrooibureau**  
**P.O. Box 29720**  
**2502 LS Den Haag (NL)**

(56) References cited:  
**EP-A- 0 712 170**

**EP 1 131 853 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### FIELD OF THE INVENTION

**[0001]** The present invention relates to systems for driving piezoelectric actuators and piezoelectric motors and more particularly to the electronic circuitry of such drivers.

### BACKGROUND OF THE INVENTION

**[0002]** Piezoelectric materials are characterized in that when they are subjected to electrical fields they can be made to deflect; i.e., produce mechanical motion. Also when mechanical stress is applied to piezoelectric elements so that they undergo displacement they generate electrical signals. These characteristics are the reason that piezoelectric materials are useful in applications ranging from sensors to mechanical motors. Examples of piezoelectric elements being used as motors is shown for example in US patents 5,714,833 and 5,777,423; which patents are assigned to the assignee of the invention of this application. Piezoelectric motors are characterized by their mechanical simplicity. They have very few parts, no separate moving parts, and there are no critical mechanical components such as gears, shafts, bearings etc. Consequently, piezoelectric motors are relatively inexpensive and highly reliable.

**[0003]** A piezoelectric element represents an electrical reactive load (mainly capacitive) that requires an AC signal of substantial voltage amplitude to cause the mechanical displacement. The required voltage amplitude is generally in the range of a few hundred volts (RMS). For effectively operating the piezoelectric element as a motor or actuator a drive circuit applies voltage thereto of a specific frequency with low harmonic distortion. For the best results, i.e. maximum displacement, the specific frequency should equal the mechanical resonant frequency of the piezoelectric element. A simplified circuit that could be used to drive a piezoelectric motor is shown in Fig. 1A, while such a motor is illustrated in Fig. 1B. This method required two sources and two matching (high-Q) resonant circuits (not shown).

**[0004]** A preferred manner of actuating bidirectional operation of the piezoelectric element provides one side of the element with a pair of electrodes that are connected to a voltage source, such as a switch mode inverter. An opposite side of the piezoelectric element has a single common electrode. The common electrode is grounded or connected to ground by passive or active elements so that current from each of the pair of electrodes flows in opposite directions to cause bidirectional displacement of the piezoelectric element.

**[0005]** The drive circuits for piezoelectric motors basically provide AC voltages to the electrodes according to the directional movement required or desired. Typical prior art drive circuits for actuating the piezoelectric elements to provide movement in a selected direction or

selected directions comprise separate inverter circuits coupled to the piezoelectric element through resonant circuitry attached to each of the elements high side electrodes. The prior art utilizes such multiple inverters to cause directional motion of the piezoelectric motors without any separate switching units. Other prior art devices utilize a single high voltage source and switching circuitry to switch the source between different electrodes. This methodology requires high voltage capable switching circuitry.

**[0006]** A major disadvantage of the prior art drivers is the complexity of the circuitry that is used. For example, a commonly used driver comprises a bridge type inverter circuit (see Fig. 2) that requires six power switches, and two high Q resonant circuits. Other prior art drivers require only one high Q resonant circuit. The reduction in the number of high Q resonant circuits is accomplished by placing the high Q resonant circuit in series with the common electrode. However, six power switches are still used in that prior art device (see EP 0712 170 A1), which application is assigned to the assignee of this application. In Fig. 7 of that device, four switches are used for displacement directional control with two switches for each of the selectable directions. The high Q resonant circuits are sensitive to the accuracy of the circuit component and to the frequency of the applied voltage. As a practical solution for overcoming this sensitively, in the prior art the Q of the drivers was often lowered and the input voltage from the prior art drivers was raised. Extra DC/DC converters were required to enable operation with lower input voltages. Consequently, in the prior art, while the piezoelectric motors are simple the driver circuitry has until now been complex, especially when driving piezoelectric motors in two directions.

### SUMMARY OF THE INVENTION

**[0007]** Accordingly, it is an object of some preferred embodiments of the present invention to provide drivers for piezoelectric elements that are reliable, simple and of low cost.

**[0008]** It is an object of some preferred embodiments of the present invention to provide drivers for piezoelectric elements that operate the piezoelectric elements as actuators or motors bi-directionally with a minimum of components.

**[0009]** It is an object of some preferred embodiments of the invention to provide bi-directional drivers for piezoelectric motors or actuators in which a single high voltage unswitched drive circuit is used for both direction of motion.

**[0010]** It is an object of some preferred embodiments of the present invention to provide bi-directional drivers for piezoelectric motors or actuators in which the direction of motion is changed by switching circuitry located at a low voltage connection of the control circuitry.

**[0011]** It is an object of some preferred embodiments of the present invention to provide drivers for piezoelec-

tric elements that utilize soft switching so as to minimize switching losses and increase the overall efficiency of the piezoelectric driver unit and to improve electromagnetic compatibility.

**[0012]** It is an object of some preferred embodiments of the present invention to provide a discrete bidirectional switching circuit used in conjunction with an AC voltage provided for operating a piezoelectric motor or other AC load.

**[0013]** Some prior art driver circuits for driving piezoelectric motor from a DC voltage source, integrally, combined switching and inverter circuitry. That is the inverters did the switching of the inverter output to the piezoelectric element's electrodes without any discrete switching circuitry. The present invention as claimed in claim 1 separates the inverter and switching portions of the driver circuitry by providing discrete switching circuitry. Surprisingly, the result is a circuit for driving the piezoelectric element bidirectionally of decreased complexity using fewer components and operating more reliably.

**[0014]** In accordance with one aspect of the invention, a driver circuit for driving a piezoelectric type motor comprises an inverter circuit for providing an oscillating voltage to cause a mechanical displacement of a piezoelectric element and a separate switching arrangement for selecting the direction of said displacement. The driver circuit in the invention of this application delivers the driving voltages to the piezoelectric element at the mechanical resonant frequency of said piezoelectric element.

**[0015]** In a preferred embodiment of the invention a discrete switch arrangement includes high frequency switches for selectively applying voltages across said piezoelectric element to cause mechanical displacement of the piezoelectric element in a selected direction or selected directions. In preferred embodiments of the invention, the switches are on a low voltage side of the connection to the piezoelectric element.

**[0016]** There is thus provided, in accordance with the invention, a micromotor comprising:

a piezoelectric element including a common electrode and a plurality of other electrodes formed thereon and including at least a first and a second electrode group, each group including at least one electrode, wherein the piezoelectric element causes motion in a first direction when a voltage is applied between the first electrode group and the common electrode and wherein the piezoelectric element causes motion in a second direction when a voltage is applied between the second electrode group and the common electrode;

an voltage source that electrifies the common electrode; and

at least two switches separately connected between the first and second electrode groups and a low voltage, said switches being activatable to connect one of said first and second electrode groups to the low voltage to cause selective motion in the first or sec-

ond directions.

**[0017]** Preferably, the low voltage is substantially ground. The applied voltage is an AC voltage.

**[0018]** In a preferred embodiment of the invention, where the piezoelectric element comprises a rectangular piezoelectric plate having first and second faces, the common electrode is formed on the first face and the first and second groups of electrodes are formed on the second face. Preferably, the first and second groups of electrodes each comprises two electrodes situated in opposite quadrants of the second face.

**[0019]** Preferably, the micromotor comprises a motive surface and motion is induced in a surface of a workpiece pressed against the motive surface when the piezoelectric element is electrified as aforesaid.

**[0020]** In a preferred embodiment of the invention, the source comprises an inverter, preferably, a forward-flyback inverter.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0021]** The above named and other features and objects of the present invention will be best understood from the following description of preferred embodiments of the invention taken in conjunction with the accompanying drawings, in which:

Figs. 1A and 1B are a simplified schematic showing of a bi-directional piezoelectric motor and associated driver circuitry of the prior art;

Fig. 2 is prior art bridge circuit implementation of a bi-directional piezoelectric motor driver;

Fig. 3 is a basic electrical component schematic showing of an AC switch operating a piezoelectric motor;

Fig. 4 is a schematic showing of a discrete bi-directional switch used with a piezoelectric motor;

Fig. 5 is a schematic showing of a preferred driver circuit comprising a forward-flyback inverter used in conjunction with the bi-directional switch for operating the piezoelectric motor,

Fig. 6 is an equivalent circuit of Fig 5 showing elements of the secondary circuitry reflected to the primary;

Fig. 7 is the schematic showing of the circuit of Fig 6 when the switch  $Q_{ff}$  is conducting;

Fig 8 is a schematic showing of the circuit of Fig 6 when the switch  $Q_{ff}$  is nonconducting;

Fig 9 is a schematic showing of a preferred driver circuit comprising a push-pull parallel resonant inverter used in conjunction with the bi-directional switch for operating the piezoelectric motor;

Fig. 10 is a schematic showing of the push-pull inverter of Fig 9 including a buck section providing output voltage control; and

Fig 11 is a showing of the voltage wave form at point A of Fig. 10.

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

**[0022]** Figs. 1A and 1B are a simplified schematic showing of a bi-directional piezoelectric motor as used in the prior art to aid in understanding the invention. The piezoelectric motor 11, comprises a piezoelectric crystal or ceramic element 12, that operates responsive to electric voltage thereacross to provide mechanical displacement.

**[0023]** As shown in Figs. 1A and 1B, to operate the motor bi-directionally, two pairs of electrodes 13 and 14 are attached to a first face 16 of element 12 and a common electrode 17 is attached to and covers substantially all of an opposite face 18 of element 12. Common electrode 17 is grounded at 19. A first AC voltage V1 is applied between electrodes 14 and 17 by the operation of switch SW1 responsive to a control signal S1. Voltage V1 causes mechanical displacement of a surface pressed against an extension 9 of element 12 in a first direction.

**[0024]** Operation of switch SW2, responsive to a control signal S2, applies a second AC voltage V2 between electrodes 13 and 17. Voltage V2 causes mechanical displacement of a surface pressed against extension 9 in a second direction. The piezoelectric element 12 is reactive in nature and mechanically resonates at particular frequencies in transverse directions.

**[0025]** It should be understood that when electrodes are shown, in the following drawings, in the manner of electrodes 13 and 14, what is meant is a configuration such as that shown in Fig. 1B.

**[0026]** Fig. 2 shows a typical prior art implementation of a bi-directional driver for a piezoelectric motor. A prior art bi-directional inverter driver as shown in Fig. 2 has a positive supply voltage  $V_{in}$  applied to conductor 21. A switch shown as Q1 is connected to conductor 21. The switch is shown as a Mosfet type transistor with the source 22 connected to the conductor 21. The switch Q1 in the preferred embodiment is operated to the conducting state by a pulsed gate control signal S1 applied to gate DR1. Responsive to the gate control signals the switch Q1 applies DC voltage  $V_{in}$  as pulses to the drain 23 of switch Q1. The drain 23 is connected to conductor 24 which connects to common electrode 17 of piezoelectric motor 11. Conductor 24 is connected to ground through switch Q2 operated to the conducting condition in response the pulsed control signal S2 applied on the gate DR2 of switch Q2. The source 26 of switch Q2 is connected to conductor 24 and the drain 27 of switch Q2 is connected to ground 28 through conductor 29.

**[0027]** Electrodes 14 of piezoelectric motor 11 is connected to the junction of a capacitor C1 and an inductor L1. Capacitor C1 and inductor L1 form a resonant circuit tuned to the mechanical resonance frequency of the piezoelectric motor. The other side of capacitor C1 is connected to conductor 24. The other side of inductor L1 is connected through conductor 30 to the junction of another pair of switches, Q5 and Q6. Transistor switches Q5

and Q6 operate to the conductive state responsive to pulsed signals S5 and S6 on the gate drivers shown as DR5 and DR6. The source 31 of switch Q5 is coupled to the DC voltage  $V_{in}$  on conductor 21. The drain 32 of switch Q5 is coupled to the source 33 of switch Q6. The drain 34 of switch Q6 is coupled is to ground conductor 29.

**[0028]** Another half bridge circuit connects electrodes 13 of the motor 11 to source voltage  $V_{in}$ . More particularly, the electrode 13 of the motor 11 is connected to the junction of inductor L2 and capacitor C2 which form a second resonant circuit. The other side of capacitor C2 is connected to conductor 24. The other side of inductor L2 is connected to the junction of the drain 36 of switch Q3 and the source 37 of switch Q4. The source 38 of switch Q3 is coupled to the DC voltage  $V_{in}$  on conductor 21. The drain 39 of switch Q4 is coupled to the grounded conductor 29. The switches Q2, Q4 are operated responsive to signals S3, S4.

**[0029]** In operation, Q1 and Q2 act together with either Q3 and Q4 or Q5 and Q6 to apply an oscillating voltage to the resonant circuit of L1/C1 or L2/C2 respectively, in a manner well known in the art. Depending on which half bridge is operated together with Q1/Q2, either electrodes 13 or 14 will be energized. This allows for reversible motion of a surface pressed against extension 9.

**[0030]** In greater detail when switches Q1, Q2 and Q5, Q6 are operated, an AC voltage is applied between electrodes 14 and 17 of the motor 11 at the resonant frequency set by capacitor C1 and inductor L1. Alternatively, an AC voltage is applied between electrodes 13 and 17 by the operation of switches Q1, Q2 and Q3, Q4. This applies an AC voltage across electrodes 13 and 17 at the resonant frequency set by inductor L2 and capacitor C2. Thus, the voltage across electrodes 13 and 17 responsive to the operation of switches Q1- Q4 cause the motor to operate in one direction and the operation of switches Q1, Q2 and Q5, Q6 cause the motor to operate in the opposite direction. This typical prior art circuitry requires two high Q resonant circuits, C1, L1 and C2, L2 and six switching components operated responsive to signals S1-S6 applied to the gates DR1-DR6.

**[0031]** A high voltage  $V_{in}$  is needed across the motor if reasonable Q factors are to be used. For example, a Q factor of 5 requires the input voltage to be about 1/5 of the required motor voltage. A motor voltage of 400 volts is reasonable. This implies that the input voltage needs to be 80 volts. If lower voltages are required then additional circuitry would have to be added.

**[0032]** Fig. 3 shows an AC switch and equivalent circuit of the piezoelectric device, respectively, useful in understanding preferred embodiments of the invention.

**[0033]** In Fig. 3,  $L_s/C_s$  represent the mechanical resonance of the piezoelectric device,  $R_s$  represents mechanical work and losses and  $C_p$  is the electrode capacitance. Since  $C_p$  is very large, an inductor is usually added in series with the piezoelectric device.

**[0034]** When switch SWL is closed,  $V_s$  is applied to the

piezoelectric device and the motor operates. When SWL is open, capacitor  $C_p$  is clamped to the peak value of  $V_s$  via diode  $D_s$ . This DC voltage is maintained so long as SWL is open. In this situation, (DC voltage across the piezoelectric element) the motor does not operate. AC Voltage appears across the diode.

**[0035]** Fig. 4 shows a preferred embodiment of the discrete bidirectional AC switch for operating with an AC voltage  $V_s$  to drive piezoelectric motor 11. As in Fig. 1, piezoelectric motor 11 comprises electrodes 13, 14 on one face and electrode 17 on the opposite face of piezoelectric element 12. While any solid state switching units can be used, in a preferred embodiment there two Mosfet switches  $M_{S1}$  and  $M_{S2}$ , each connected to electrodes 13 and 14 respectively are used as the switches. Diodes  $D_{S1}$  and  $D_{S2}$  shown as connected across the switches  $M_{S1}$  and  $M_{S2}$  are inherent in Mosfet transistors. Source 41 of switch  $M_{S1}$  and diode  $D_{S1}$  are both connected to electrodes 13 of motor 11. Drain 42 of switch  $M_{S1}$  and the other side of diode  $D_{S1}$  are shown as being grounded at 43. Source 44 of switch  $M_{S2}$  is connected to the anode of diode  $D_{S2}$  and to electrodes 14. Drain 46 of switch  $M_{S2}$  is connected ground 43 through conductor 47. One side of the alternating voltage source is connected to the common electrode 17 of the piezoelectric motor 11 while the other side of the voltage source is coupled to ground through conductor 47. The operating direction of the piezoelectric motor 11 is controlled by gate voltages  $V_{gs1}$  and  $V_{gs2}$  applied to the gates of switches  $M_{S1}$  and  $M_{S2}$  respectively. When  $M_{S1}$  is closed (and  $M_{S2}$  is open), the AC voltage is applied between electrodes 17 and 13 and a surface pressed against extension 9 moves in a first direction. When  $M_{S2}$  is closed an  $M_{S1}$  is open, travel is in the reverse direction.

**[0036]** This is facilitated by the fact that when  $M_{S2}$  is open, it disconnects the AC current path (the AC voltage appears across the switch) from electrode 14. The DC voltage that develops, under these conditions, between electrodes 14 and 17 does not interfere with the operation of the motor, as effected by the AC voltage between electrodes 17 and 13.

**[0037]** Major advantages of this bidirectional switching configuration is that:

- a) the control voltages are all referred to ground, and
- b) only one AC source is required.

**[0038]** One reason these advantages are available is that unlike the prior art drivers, the common electrode is not referenced to ground, Rather, one of the electrode pairs 13 or 14 is grounded. This allows for a single power source to feed the common electrode and, since the individual electrodes are near ground, for the switching to be controlled with low voltages.

**[0039]** This switching scheme can be incorporated in conjunction with any inverter driver but it has special merits when the inverter configuration of this invention is used to provide the driving voltage  $V_s$ .

**[0040]** A preferred embodiment of the AC source is a forward-flyback type inverter such as schematically shown in Fig. 5. Therein a high frequency switch such as Mosfet transistor  $Q_{ff}$  51 is driven by square wave signal  $V_{sg}$  applied to the gate electrode 52. Source 54 of switch  $Q_{ff}$  is connected to a primary winding 58 of a two winding magnetic element indicated at 53. Drain 56 of switch  $Q_{ff}$  is coupled to ground 57. While many types of switches can be used at  $Q_{ff}$ , the preferred embodiment encompasses a Mosfet type transistor. The diode inherent in the Mosfet transistor is shown as Decoupled from drain 56 to source 54 of transistor  $Q_{ff}$ . The other side of the primary winding 58 of the magnetic element 53 is connected to positive DC voltage  $V_{in}$  as shown at 59. The switch  $Q_{ff}$  is bridged by a capacitance  $C_r$  connected between its source 54 and drain, 56. Capacitance  $C_r$  forms a resonant circuit with the other reactive components.

**[0041]** The inverter is preferably connected to piezoelectric element 12 and the pair of discrete bidirectional switchs through the secondary winding 61 of the two winding magnetic element 53. The turns ratio between the primary winding 58 and the secondary winding 61 is shown as being 1:n where n in one preferred embodiment is in a range between 2 and 25.

**[0042]** One side of winding 61 is preferably connected to ground at 62. The other side is connected to the common electrode 17 of the motor 11. The other electrodes of the motor 11, i.e. electrode pairs 13 and 14 are connected to high frequency switches such as switches  $M_{S1}$  and  $M_{S2}$ , in the manner described above with respect to Fig. 4.

**[0043]** The operation of the combination of the discrete inverter and the discrete bi-directional switch, in combination, is more clearly understood with reference to the schematic of Fig. 6. That schematic shows one of the switches open and the other closed with all secondary components (including the closed lines) being reflected to the primary. The inductance of the two element magnetic unit 53 is shown as  $L_{1kg}$ , i.e. the leakage inductance of the magnetic element 53. The piezoelectric element 12 of the motor 11 is represented by the impedance  $Z_M$  which is mainly capacitive in the nature at the mechanical resonance frequency. It is shown as being divided by  $n^2$  when reflected into the primary of magnetic unit 53.

**[0044]** A square wave voltage  $V_{sq}$  is shown applied to the gate of switch  $Q_{ff}$  whose drain is connected ground and whose source is connected to inductor  $L_m$  and to motor (impedance) element  $Z_M$ . Diode  $D_{ff}$  is shown as is resonance capacitance  $C_r$ , both bridging switch  $Q_{ff}$ . Capacitance  $C_r$  is in series with and resonates with the inductance  $L_m$  bridged by the leakage inductance  $L_{lkg}$  in series with the reactance  $Z_M/n^2$ .

**[0045]** While a square wave operating voltage  $V_{sg}$  is shown; it should be understood that the operating voltage can assume other forms as known in the art within the scope of the invention.

**[0046]** When the switch  $Q_{ff}$  is conducting, as shown in Fig. 7, energy is delivered to the motor in a resonant

manner in the two half cycles. When the high frequency switch  $Q_{ff}$  is conducting, energy is transferred from the voltage source to the motor and energy is also stored in inductance  $L_m$ . A resonance circuit is formed between the leakage inductor  $L_{kj}$  and the motor impedance  $Z_m$ . Hence the voltage wave form fed to the motor is sinusoidal. During a non conducting period of the switch  $Q_{ff}$ , as shown in Fig. 8, the energy stored in the inductance  $L_m$  is transferred to the motor. Notice that the voltage to the motor now is of opposite polarity than the voltage that was applied during the conducting stage of switch  $Q_{ff}$ . Reactive element  $L_m$ , bridged by the series connection of  $L_{kj}$  and  $Z_m/n^2$  forms a resonant circuit that can shape the voltage across the motor to be sinusoidal by properly choosing the circuit parameters. Preferably, this circuit is resonant at the mechanical resonance frequency.

**[0047]** Note that, when the wave form across the switch is sinusoidal, the switch operates under "soft" switching conditions. In other words if switch  $Q_{ff}$  turns off after voltage across it reduces to zero, the switch is turned on under zero voltage conditions. Then, when the switch  $Q_{ff}$  is turned off, the voltage will rise across it relatively slowly due to the action of capacitor  $C_r$ . Hence zero voltage switching at turn off is achieved.

**[0048]** Thus the circuit of Fig. 5, according to this preferred embodiment of the invention, may have one or more of a number of advantages, for example:

- i) a single switch is used for implementing the inverter section,
- ii) all signal drives are referred to one ground,
- iii) by choosing the proper turns ratio the motor voltage can be made high even if  $V_{in}$  is a low DC voltage,
- iv) the motor signals are of low harmonic content, and in addition
- v) the total part count is very low, i.e. the inverter section is based on a single transistor and the discrete bidirectional switch has only two transistors.

**[0049]** Further the embodiment of Fig 5 is suitable for relatively low power levels.

**[0050]** As can be well understood, the exact design details for such circuitry is a function of the exact physical and electrical parameters. However, the design can be optimized for the particular characteristics of piezoelectric element utilizing design programs such as SPICE or the like. Once such a design is achieved, the components (including the non-ideal transformers used in the designs) may be designed and produced using methods well known in the art or magnetic component design.

**[0051]** Another preferred embodiment of the invention is shown in Fig. 9, in which the discrete inverter is of a push-pull configuration. The push-pull configuration is suitable for higher power levels than is the forward flyback inverter. In the push-pull arrangement of the inverter shown in Fig 9, two switches  $Q_{p1}$  and  $Q_{p2}$  operate on the load in a push-pull manner through a resonant network. The resonant network comprises the inductance of a

transformer TR whose secondary is bridged by capacitor  $C_{pp}$ . Current from the DC voltage  $V_{in}$  is applied to primary 66 of transformer TR through series inductor  $L_{sp}$ . The input to the transformer is to the middle of the primary windings 66 as shown in Fig 9. In a preferred embodiment of the invention, the two switches  $Q_{p1}$  and  $Q_{p2}$  are Mosfet transistors.

**[0052]** One side of primary 66, goes to the source 67 of transistor  $Q_{p1}$ . Drain 68 of transistor  $Q_{p1}$  is coupled to ground at 69. The other side of the primary winding 66 of transformer TR is coupled to source 72 of switch Q. Drain 73 of transistor switch  $Q_{p2}$  is coupled to ground. Both transistors  $Q_{p1}$  and  $Q_{p2}$  are shown as having square wave control voltages applied to their gates 74 and 76 respectively, for converting the DC voltage input to an AC voltage at the resonant frequency. Control voltages with other waveforms could be used within the scope of the invention. The secondary winding n1 of transformer TR, has one side 77 connected to ground and the other side 78 connected to common electrode 17 of motor 11. When the parameters of the circuit are properly chosen the signal fed to the motor 11 will be of a sinusoidal shape with low harmonic distortion.

**[0053]** The major benefit of the push-pull embodiment over the forward-flyback embodiment is the capability to handle higher power levels. Furthermore, by slight modification, the output of voltage of the push-pull embodiment can be further controlled as is illustrated in Fig 10 Here an additional high frequency switch  $Q_{buck}$  and diode  $D_{buck}$  have been added. These elements together with inductor  $L_{sp}$  form a "down" or "buck" inverter. This type of inverter is controlled by the duty cycle  $D_{on}$  of  $Q_{buck}$ . Assuming a sinusoidal wave form, the voltage at point "A" in Fig. 11 will be as shown in Fig. 11. The peak value  $V_{pk}$  of this wave form will be related to the motor voltage by the equation:

$$V_{PK} = V_{motor}/n.$$

**[0054]** At steady state, the average voltage across the inductor  $L_{sp}$  will be zero and hence the average of  $V_{pk}$  must be equal to the voltage at point "B" in Fig. 10 which is equal to  $V_{in} \cdot D_{on}$ . Hence:

$$V_{PK} = nV_{in} \cdot D_{on}.$$

**[0055]** Consequently from these equations:

$$V_{motor} = n \cdot V_{in} \cdot D_{on}.$$

**[0056]** Hence the motor voltage can be controlled by varying  $D_{on}$  of  $Q_{buck}$ . This feature is particularly applica-

ble when variable motor voltages, are called for such as for varying the speed of the motor.

[0057] The preferred embodiments have been described in relation to a piezoelectric motor having a common electrode on one face of a piezoelectric ceramic and two pairs of electrodes on the other face. However, the motor may also operate more of fewer electrodes and with different configuration. Further it can be adapted to other configurations of piezoelectric motors.

[0058] Furthermore, a bipolar switch in accordance a preferred embodiment of the invention may be used for various other applications. In fact many AC loads may be switched using such a bipolar switch. In general, it is difficult to switch an AC load with a single MOS transistor. In accordance with a preferred embodiment of the invention, a switch, such as one half of the circuit shown in Fig. 4, may be used to switch a capacitive AC load, using a single transistor. Furthermore, if the load is not capacitive a large (compared to the admittance of the load) capacitor may be placed in series with the load. For AC purposes (i.e., when the switch is closed) the capacitor has negligible effect. However, when the switch is open, the voltage across the capacitor will rise to the peak of the AC voltage switching the load off, as described above.

[0059] Various modifications will be apparent to and will be readily available to those skilled in the art without departing from the scope of the invention. Accordingly it is not intended that the scope of the claims appended hereto be limited to the description as set forth herein but rather that the claims be broadly construed. It should be understood that the verbs "comprise" and "include" and their conjugations, when used in the claims, mean "including, but not necessarily limited to."

## Claims

### 1. A micromotor (11) comprising:

a piezoelectric element (12) having a common electrode (17) and a plurality of other electrodes (13, 14), including at least a first and a second electrode group, formed thereon, and, each group including at least one electrode;  
 a voltage source ( $V_S$ ) that produces an oscillating voltage between first and second terminals thereof, said first terminal being connected to the common electrode and said second terminal being connected to a low voltage;  
 a switching arrangement having at least one first switch (MS1) connected between said first group of electrodes and the second terminal of the voltage source and having at least one second switch (MS2) connected between said second group of electrodes and the second terminal of the voltage source; and  
 a controller that selectively energizes the switches to selectively connect either the first or the

second group of electrodes to the second terminal, said selective connection causing selective motion either in a first direction or in an opposite second direction.

2. A micromotor according to claim 1 wherein the low voltage is substantially ground.
3. A micromotor according to any of the preceding claims wherein the piezoelectric element comprises a rectangular piezoelectric plate having first and second faces wherein the common electrode is formed on the first face and the first and second groups of electrodes are formed on the second face.
4. A micromotor according to claim 3 wherein the first and second groups of electrodes each comprise two electrodes situated in opposite quadrants of the second face.
5. A micromotor according to any of the preceding claims wherein the micromotor comprises a motive surface and wherein motion is induced in a surface of a workpiece pressed against the motive surface when the piezoelectric element is electrified as aforesaid.
6. A micromotor according to any of the preceding claims wherein said source comprises an inverter.

## Patentansprüche

### 1. Mikromotor (11) umfassend:

ein piezoelektrisches Element (12) mit einer gemeinsamen Elektrode (17) und einer Vielzahl weiterer Elektroden (13, 14), mit zumindest einer ersten oder zweiten Elektrodengruppe, die darauf ausgebildet sind, wobei jede Gruppe mindestens eine Elektrode umfasst;  
 eine Spannungsquelle ( $V_S$ ), die eine oszillierende Spannung zwischen einem ersten und einem zweiten Anschluss der Spannungsquelle erzeugt, wobei der erste Anschluss mit der gemeinsamen Elektrode verbunden ist, und der zweite Anschluss mit einer niedrigen Spannung verbunden ist;  
 eine Schaltungsanordnung mit zumindest einem ersten Schalter (MS1), der zwischen der ersten Gruppe von Elektroden und dem zweiten Anschluss der Spannungsquelle angeschlossen ist, und mit zumindest einem zweiten Schalter (MS2), der zwischen der zweiten Gruppe von Elektroden und dem zweiten Anschluss der Spannungsquelle angeschlossen ist; und  
 eine Steuerung, die selektiv die Schalter mit Energie versieht, um entweder die erste oder die

- zweite Gruppe von Elektroden mit dem zweiten Anschluss zu verbinden, wobei die selektive Verbindung eine selektive Bewegung entweder in eine erste Richtung oder in eine entgegengesetzte zweite Richtung verursacht. 5
2. Mikromotor nach Anspruch 1, wobei die niedrige Spannung im Wesentlichen Masse ist.
3. Mikromotor nach einem der vorangehenden Ansprüche, wobei das piezoelektrische Element eine rechteckige piezoelektrische Platte mit ersten und zweiten Seiten umfasst, wobei die gemeinsame Elektrode auf der ersten Seite und die erste und zweite Gruppe der Elektroden auf der zweiten Seite ausgebildet sind. 10 15
4. Mikromotor nach Anspruch 3, wobei die erste und zweite Gruppe von Elektroden jeweils zwei Elektroden umfassen, die in entgegengesetzten Quadranten der zweiten Seite angeordnet sind. 20
5. Mikromotor nach einem der vorangehenden Ansprüche, wobei der Mikromotor eine Antriebsoberfläche umfasst, wobei der Antrieb in einer Oberfläche eines Werkstücks erzeugt wird, welches gegen die Antriebsoberfläche gepresst wird, wenn das piezoelektrische Element wie oben beschrieben mit Energie versehen wird. 25 30
6. Mikromotor nach einem der vorangehenden Ansprüche, wobei die Quelle einen Inverter umfasst.
- ment soit le premier soit le second groupe d'électrodes à la seconde borne, ladite liaison sélective provoquant un mouvement sélectif soit dans une première direction soit dans une seconde direction opposée.
2. Micromoteur selon la revendication 1, dans lequel la basse tension est sensiblement la terre.
3. Micromoteur selon l'une quelconque des revendications précédentes, dans lequel l'élément piézoélectrique comprend une plaque piézoélectrique rectangulaire ayant de première et seconde faces, l'électrode commune étant formée sur la première face et les premier et second groupes d'électrodes étant formés sur la seconde face.
4. Micromoteur selon la revendication 3, dans lequel les premier et second groupes d'électrodes comprennent chacun deux électrodes situées dans des quadrants opposés de la seconde face.
5. Micromoteur selon l'une quelconque des revendications précédentes, dans lequel le micromoteur comprend une surface motrice et dans lequel un mouvement est induit dans une surface d'une pièce de travail pressée contre la surface motrice lorsque l'élément piézoélectrique est électrisé comme indiqué précédemment.
6. Micromoteur selon l'une quelconque des revendications précédentes, dans lequel ladite source comprend un onduleur.

## Revendications

### 1. Micromoteur (11) comprenant :

- un élément piézoélectrique (12) ayant une électrode commune (17) et une pluralité d'autres électrodes (13, 14), incluant au moins un premier et un second groupes d'électrodes, formées dessus, et, chaque groupe incluant au moins une électrode ; 40
- une source de tension ( $V_s$ ) qui produit une tension oscillante entre des première et seconde bornes de celle-ci, ladite première borne étant reliée à l'électrode commune et ladite seconde borne étant reliée à une basse tension ; 45
- un agencement de commutation ayant au moins un premier commutateur (MS1) relié entre ledit premier groupe d'électrodes et la seconde borne de la source de tension et ayant au moins un second commutateur (MS2) relié entre ledit second groupe d'électrodes et la seconde borne de la source de tension ; et 50 55
- un dispositif de commande qui excite sélectivement les commutateurs pour relier sélective-

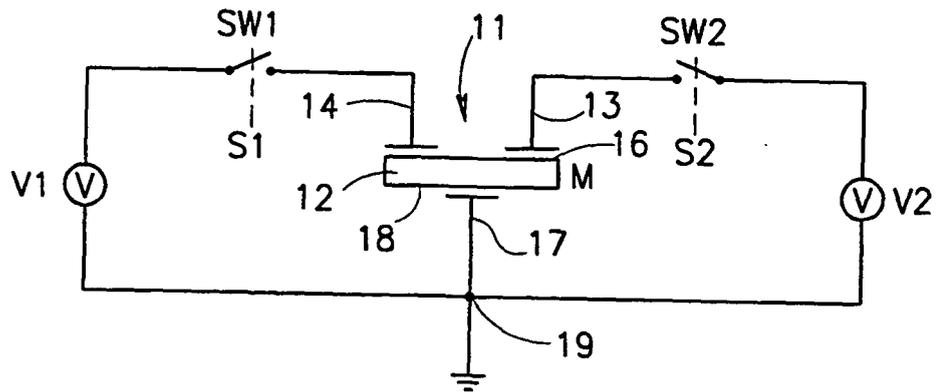


FIG. 1A  
PRIOR ART

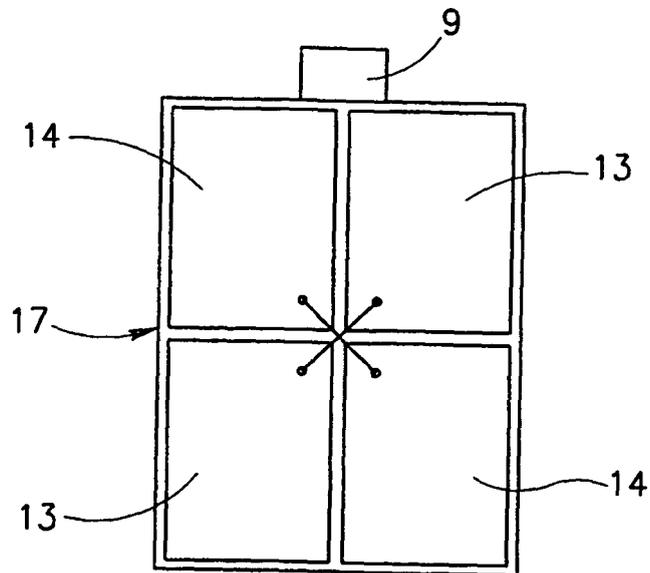


FIG. 1B

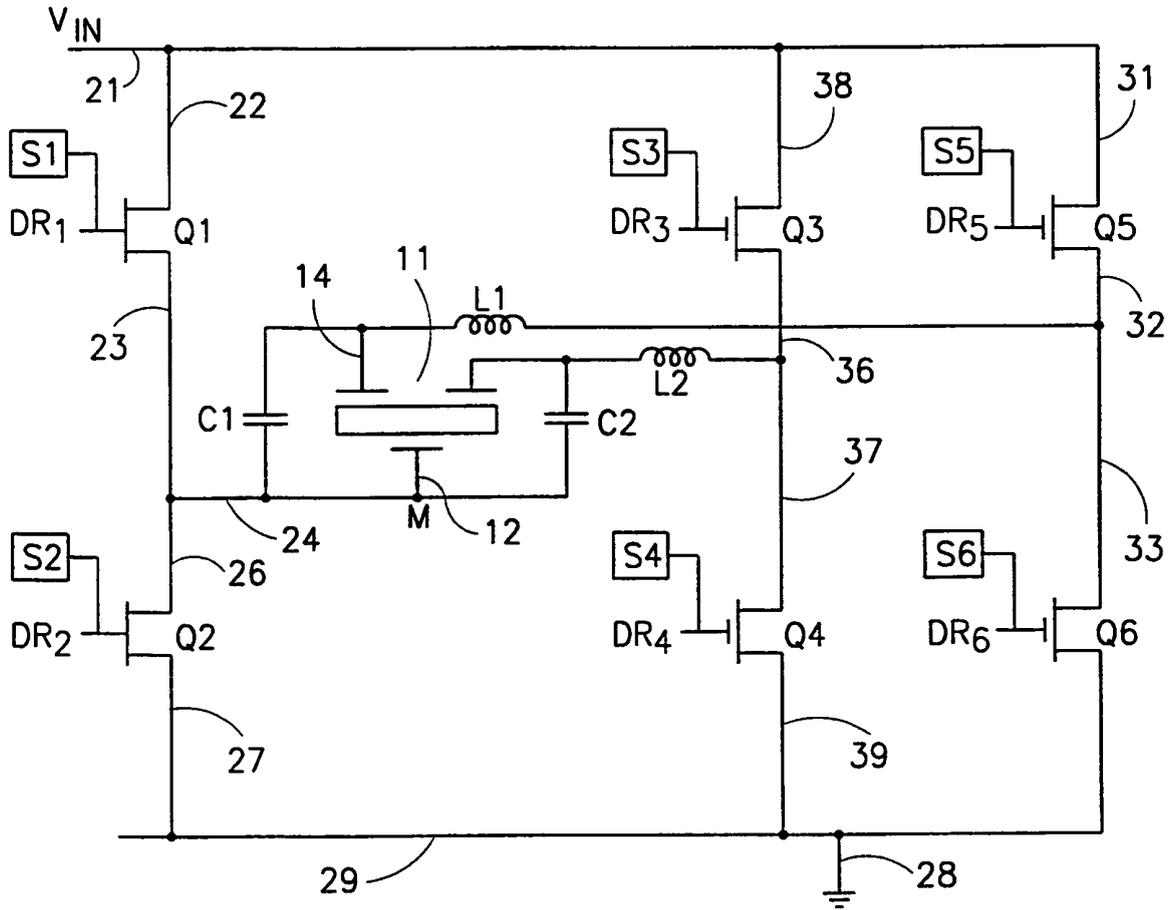


FIG.2  
PRIOR ART

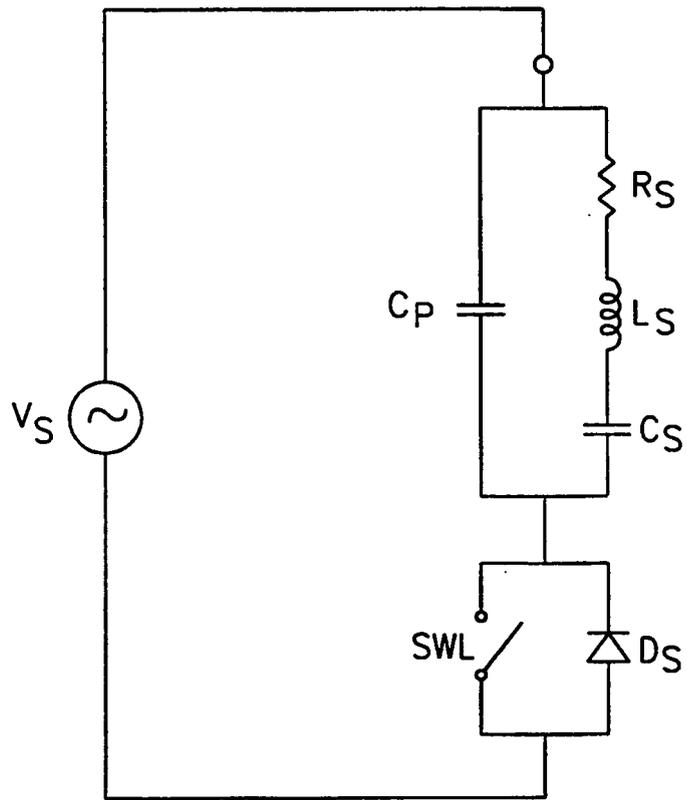


FIG. 3

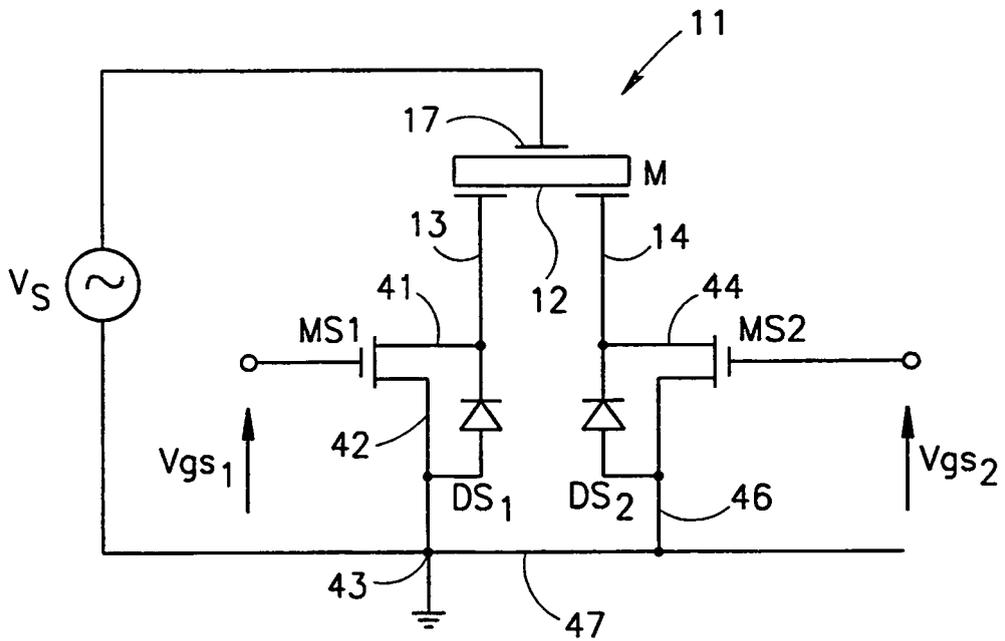


FIG. 4

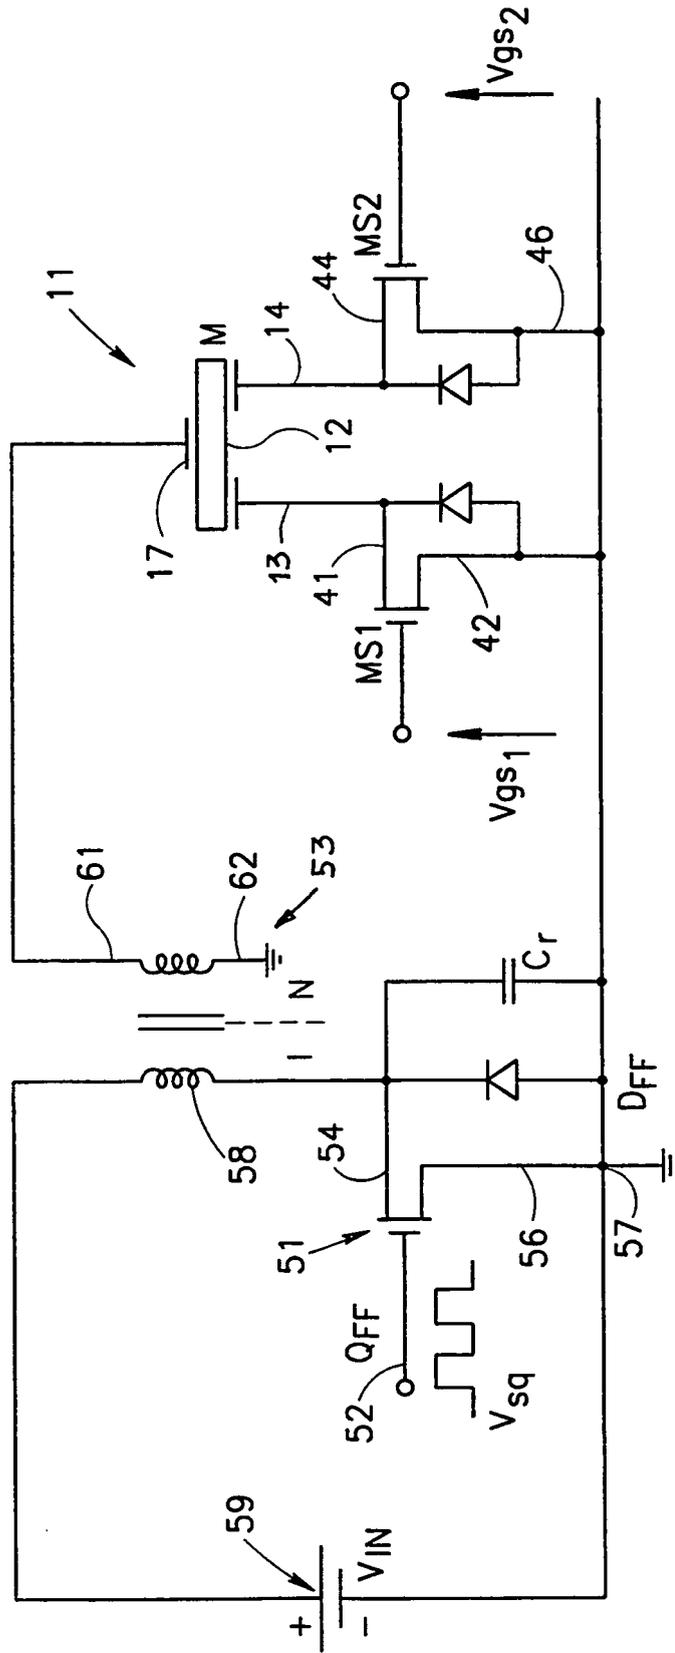


FIG.5

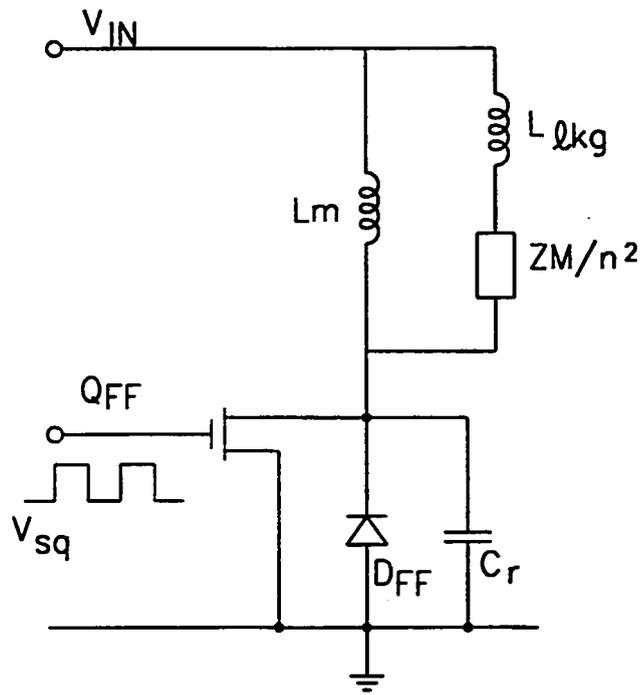


FIG.6

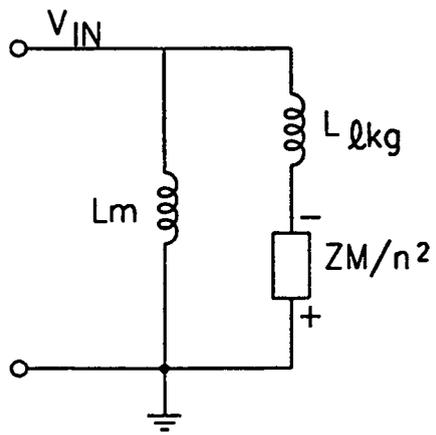


FIG.7

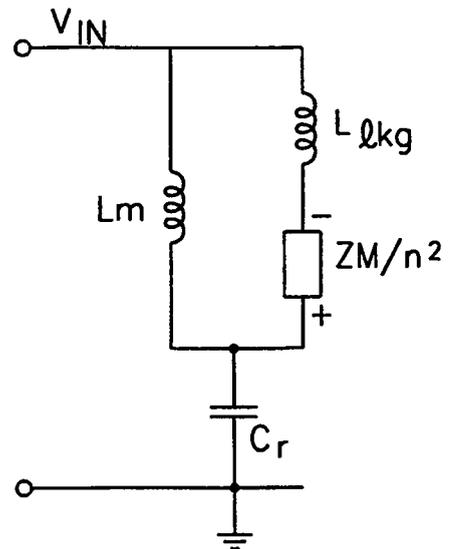


FIG.8

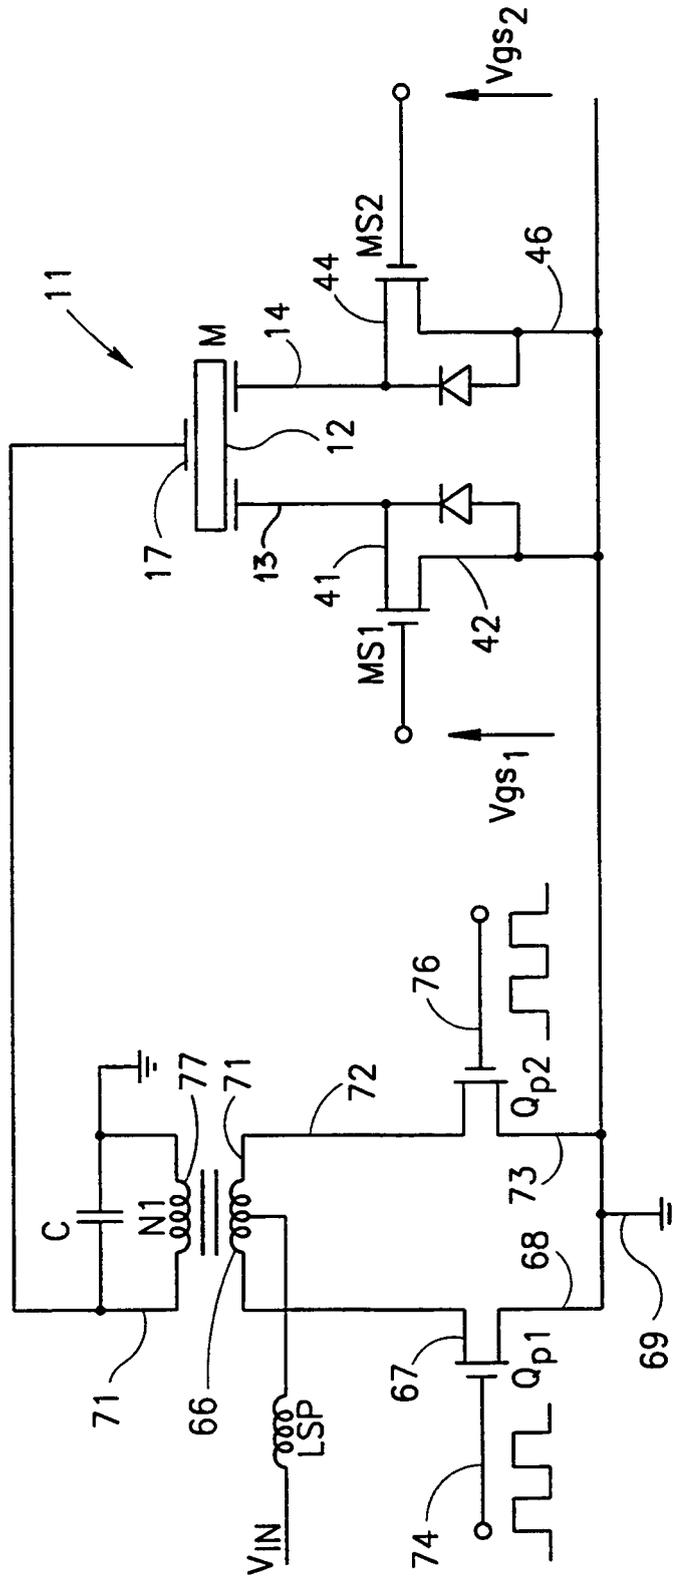


FIG.9

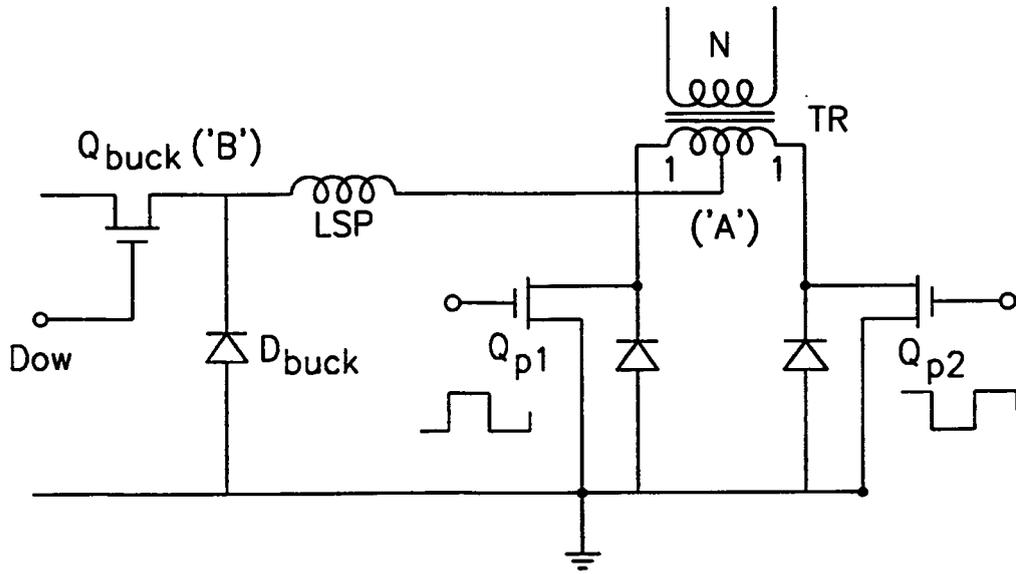


FIG. 10

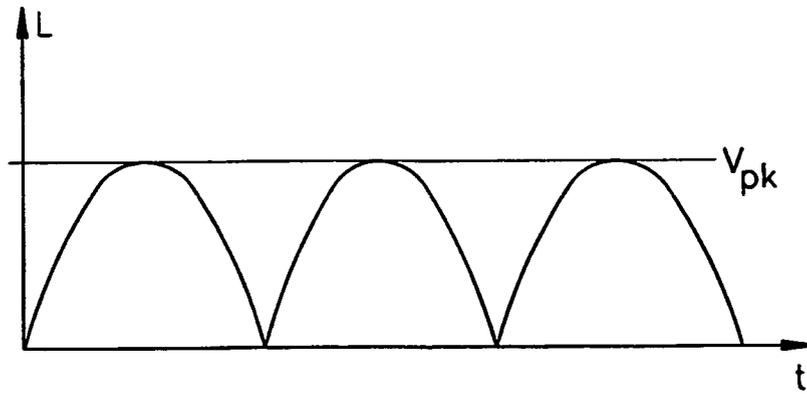


FIG. 11

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 5714833 A [0002]
- US 5777423 A [0002]
- EP 0712170 A1 [0006]